urbini™

Petal Infant Car Seat

for Touri Travel System

www.urbinibaby.com

Read all instructions before use.

If these instructions are not followed, the safety of a child may be severely endangered. Keep instructions for future use.

©2013 IM0004A 11/2013

1. **Registering Your Child Restraint** **4**
For Recall Information **5**
Certification **5**
If You Need Assistance or Have Questions **5**
2. **Warnings and Important Information** **6-10**
3. **Child Height and Weight Limits** **11**
4. **Base Features** **12-13**
5. **Carrier Features** **14-17**
6. **LATCH Location** **18**
7. **Vehicle Installation Locations** **19**
UNSAFE Vehicle Seat Belt Types **20-21**
SAFE Vehicle Seat Belt Types **22-23**
8. **Base Installation**
With **LATCH** **24-27**
With **Lap/Shoulder Belt** **28-31**
With **Lap Belt** **32-35**

9. Child Restraint Installation WITHOUT Base Using the Vehicle Belt

Lap Belt **36-37**

Lap/Shoulder Belt..... **38-39**

Lap/Shoulder Belt (Alternate Method)..... **40-41**

10. Checking the Recline..... **42-43**

11. Adjusting the Recline..... **44-45**

12. Placing Your Child in the Carrier..... **46-48**

Changing the Buckle Strap Position..... **49**

Changing the Waist Strap Position **50-53**

Using the Body Support..... **54**
Using the Preemie Insert..... **55**

13. Securing Your Child in the Restraint..... **56-57**

14. LATCH Storage **58**

15. Instruction Manual Storage..... **58**

16. Care and Maintenance..... **59**

17. Warranty Information and Replacement Parts..... **60**

1. Registering Your Child Restraint

Please complete the pre-paid registration card that is attached to your child restraint and send the portion shown below in today.

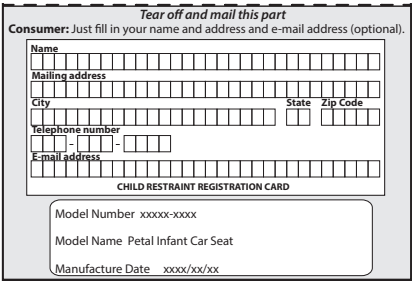
Tear off and mail this part

Consumer: Just fill in your name and address and e-mail address (optional).

Name

Mailing address

City **State** **Zip Code**

Telephone number

E-mail address

CHILD RESTRAINT REGISTRATION CARD

Model Number xxxxx-xxxx

Model Name Petal Infant Car Seat

Manufacture Date xxxx/xx/xx

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, e-mail address if available and the restraint's model number and manufacturing date to:

Aria Child Inc.
P.O. Box 1415
New York, NY 10102-2195
or call 1-888-569-7288

or register online at:
http://www.urbinibaby.com/carseatregistration

For Recall Information

Call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY:1-800-424-9153), or go to *http://www.NHTSA.gov*

Certification

This child restraint conforms to all applicable Federal motor vehicle safety standards. This Restraint is Certified for Use in Motor Vehicles and Aircraft.

It is not intended to be used in low-speed vehicles such as golf carts, ATV's or any other non-certified vehicle.

If You Need Assistance or Have Questions

If you have any questions regarding installation of your seat , please contact us at:

Aria Child Inc.
530 Harrison Ave.
Boston, MA 02118
1-888-569-7288
www.urbinibaby.com

For helpful information regarding child restraints :

www.NHTSA.gov
www.saferproducts.gov
www.seatcheck.org

2. Warnings and Important Information

⚠WARNING

DO NOT place rear-facing child seat on front seat with air bag. DEATH OR SERIOUS INJURY can occur. The back seat is the safest place for children 12 and under.

WHEN USED IN YOUR VEHICLE

- Owners of vehicles with side airbags should refer to their owner's manual for child restraint installation instructions.
- **ACCORDING TO ACCIDENT STATISTICS,** children are safer when properly restrained in rear vehicle seating positions, rather than in the front seating positions.
- **REGISTER YOUR CHILD RESTRAINT** with the manufacturer.
- **READ AND UNDERSTAND** the instructions in this manual and in your vehicle owner's manual before installing your child restraint and base.
- **IMPROPER USE OF THIS CHILD RESTRAINT** and base could increase the risk of a serious injury or death in a sudden stop or car crash.
- **FOLLOW ALL INSTRUCTIONS** on this child restraint and in the written instructions located under the seat pad.

⚠WARNING

- **USE ONLY WITH** children who weigh between 4 - 35 lbs (1.8 - 15.9 kg) and whose height is 32 inches (81cm) or less. Child's head **MUST** be 1" (2.5 cm) or more below the top of the seat.
- **FOR LOW BIRTH-WEIGHT INFANT,** you must always use the preemie insert in the body support. The preemie insert must be used for infants who weigh less than 6 lbs (2.7 kg). Only use the body support when the harness is used in the bottom 2 sets of harness slots.
- **SOME CHILDREN WITH SPECIAL NEEDS**, such as preemies or those who have tested positive for positional apnea, may be at increased risk of suffering breathing or other difficulties in a child restraint. Please consult a physician to determine what type of child restraint should be used for your child before using this product.
- **SNUGLY ADJUST** the belts provided with this child restraint around your child.
- **NEVER LEAVE CHILD UNATTENDED** in or around the vehicle. Vehicle backovers can happen in any type of vehicle. Vehicles have blind spots, the areas around the vehicle that you can not see from the driving position. Always check around the vehicle before moving your vehicle.
- **ONLY PLACE THIS CHILD RESTRAINT IN A REAR-FACING DIRECTION** on a forward facing vehicle seat when using it in a vehicle. Refer to page 19.

⚠WARNING

- **NEVER** place this child restraint on side-facing or rear facing vehicle seats.
- **SECURE THIS CHILD RESTRAINT** with the vehicle's child restraint anchorage system (LATCH) if available or with a vehicle belt, never both.
- **ALWAYS TIGHTLY INSTALL THE CHILD RESTRAINT AND BASE TO THE VEHICLE SEAT,** since in a crash an unsecured child restraint system may injure other occupants.
- **TO PREVENT EJECTION,** SECURELY ATTACH the child restraint to the base and LIFT UP TO CHECK that it is attached.
- **MAKE SURE** nothing interferes with the carrier attachment to the base.
- **ALWAYS** store the LATCH connectors when they are not being used for installation.
- **NEVER** place two LATCH connectors on one vehicle LATCH anchor.
- **AFTER INSTALLING CARRIER WITHOUT BASE INTO THE VEHICLE,** check the RED level line beneath the handle to make sure that it is level with the ground.
- **DO NOT** allow children to play with the vehicle seat belts. A child within reach of a seat belt may become entangled if he or she pulls the seat belt all the way out and wraps the belt around his or her head, neck, or waist.

⚠WARNING

WHEN *NOT* USED IN A VEHICLE

- **NEVER LEAVE** child unattended.
- **SUFFOCATION HAZARD:** Infant carrier can roll over on soft surfaces and suffocate child. NEVER place carrier on beds, sofas or other soft surfaces.
- **STRANGULATION HAZARD:** Child can strangle in loose restraint straps. Always use harness. NEVER leave child in carrier when straps are loose or undone.
- Children have **STRANGLED** in loose or partially buckled harness straps. Fully restrain the child even when carrier is used outside the vehicle.
- **FALL HAZARD:** Child's movements can slide carrier. NEVER place carrier near edges of counter tops, tables, or other elevated surfaces. DO NOT use on shopping carts.
- **NEVER USE INFANT CARRIER OR BASE IF IT HAS BEEN DAMAGED OR BROKEN OR ANY COMPONENT IS MISSING.** DO NOT use a cut, frayed or damaged child restraint harness, vehicle seat belt or **LATCH** belt.
- **WHEN USING THIS CHILD RESTRAINT WITH A STROLLER, ONLY USE** with the ***Urbini Touri Travel System***. Refer to your stroller USER GUIDE for stroller attachment instructions. NEVER use this child restraint with other manufacturer's strollers or with strollers for which it was not intended.

IMPORTANT INFORMATION

- **DO NOT** allow children to play with the child restraint.
- **ALWAYS MAKE SURE** handle is locked in the upright carrying position before lifting. An unlocked handle could result in serious injury to your child from falling from the child restraint.
- **ALWAYS REPLACE THE CHILD RESTRAINT AND BASE AFTER A CRASH OF ANY KIND EVEN IF IT WAS UNOCCUPIED.** A crash can cause unseen damage to the child restraint that may not be visible.
- **DO NOT MODIFY YOUR CHILD RESTRAINT OR BASE** or use any accessories or parts not supplied by the manufacturer of your child restraint.
- **THE CHILD RESTRAINT MAY BECOME VERY HOT IF LEFT IN THE SUN OR HOT AREAS.** Always make sure to check the temperature of any metal or plastic parts before placing your child in the child restraint.
- **NEVER** allow someone else to use this infant restraint and base without also passing along this manual to them.
- **NEVER** use a second-hand child restraint or base or a child restraint or base that you do not know its history.
- **DISCONTINUE USE** of this child restraint after 6 years from the manufacture date. The manufacture date can be found on the underside of your child restraint.

3. Child Height and Weight Limits

The American Academy of Pediatrics recommends children should ride rear-facing for as long as possible up to 2 years in age, or until they reach maximum height and weight for their seat. Do not use this child restraint beyond the expiration date or if the child exceeds the limits of this seat.

Your child **MUST** meet the height and weight requirements listed:

WEIGHT: 4 - 35 lbs. (1.8 kg-15.9 kg)

HEIGHT: 32 inches (81 cm) or less in height.

CHILD'S HEAD MUST be 1" (2.5 cm) or more below the top of the seat as shown below:

4. Base Features



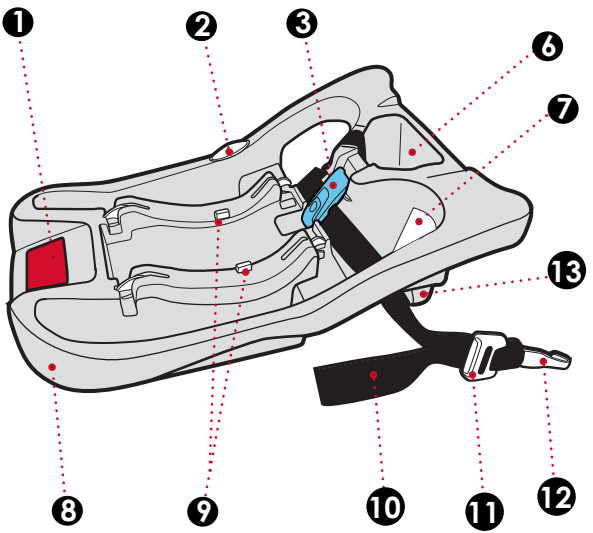

❶ Release Handle
❷ Level Indicator
❸ Belt Lock-Off
❹ LATCH Anchor Strap Guides
❺ LATCH Anchor Strap
❻ LATCH Storage Compartment
❼ Belt Path
❽ BASE
❾ Carrier to Base Indicators
❿ LATCH Adjustment Strap
⓫ LATCH Release Button
⓬ LATCH Belt Connector
⓭ Recline Foot

5. Carrier Features

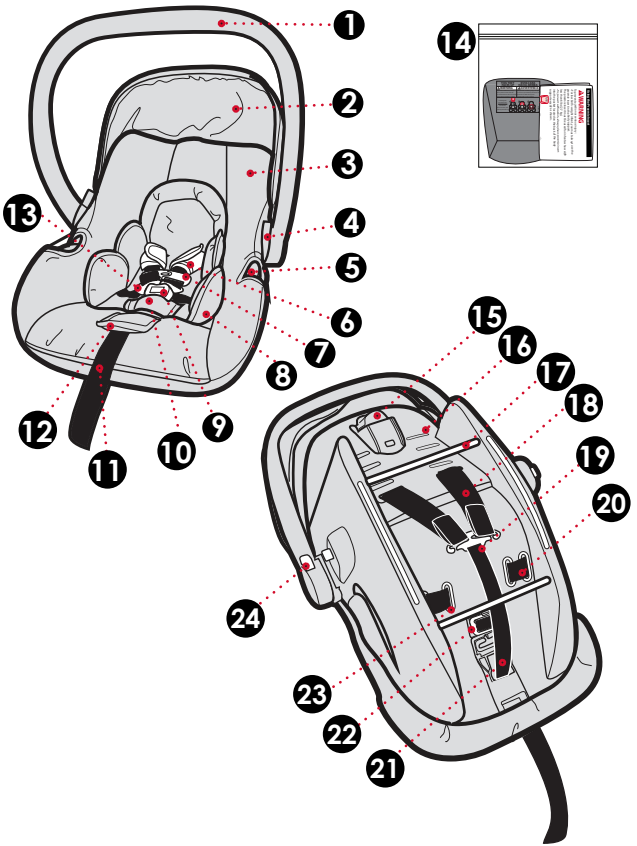

1. Handle
2. Canopy
3. Seat Pad
4. Stroller Release Button
5. Lap Belt Guide
6. Harness Cover
7. Chest Clip
8. Body Support
9. Buckle
10. Buckle Strap Cover
11. Harness Adjustment Strap
12. Harness Adjustment Button (under seat pad)
13. Buckle Tongue
14. Preemie Insert (in plastic bag with instruction sheet)
15. Shoulder Belt Guide
16. Harness Slots
17. Base Attachment Rods
18. Harness Strap
19. Splitter Plate
20. Waist Strap
21. Harness Adjustment Strap
22. Buckle Retainer
23. Waist Strap Slots
24. Handle Adjustment Button

Handle

⚠WARNING

ALWAYS make sure the handle is securely locked in the upright carrying position (A) before carrying. ANY locked position can be used in vehicle.



There are 4 positions:
- Carrying position (A),
- Middle positions (B - C),
- Stationary position (D).

To adjust, squeeze handle release buttons on both sides, then rotate the handle. The handle will lock into position.



You should hear a click when the handle button is engaged and handle is locked into position. Always check to make sure handle is locked into place after adjusting.

Canopy



To attach canopy, insert the canopy bow into the canopy mounts on both sides of the seat until the button clicks into place.



Fasten snap to canopy mount as shown.



To remove, press tab as shown, canopy can be removed for washing.

6. LATCH Location

LATCH stands for Lower Anchors and Tethers for Children.

It makes installation easier without using the vehicle's seat belts. **LATCH** is a way to secure your child restraint to your vehicle by using the **LATCH** connectors on your child restraint base. These connectors attach to the lower anchor points in certain vehicle seating positions.

The child restraint base is designed to be used at the standard spacing of 11" from the center of one anchor point to the center of another anchor point. Please refer to your vehicle owner's manual for information about using **LATCH** in certain seating positions.

LATCH may be used for spacing larger than 11" ONLY if your vehicle manufacturer allows it.

If your vehicle does not have lower anchor points you can still install your child restraint with the vehicle's belt system.



7. Vehicle Installation Locations

⚠WARNING

Failure to place the child restraint in the correct seating positions increases the risk of serious injury or death. DO NOT place rear-facing child seat on front seat with air bag. DEATH OR SERIOUS INJURY can occur. The back seat is the safest place for children 12 and under. Owners of vehicles with airbags should refer to their owner's manual for child restraint installation instructions.

The VEHICLE seat must face forward.



NEVER place the child restraint on any vehicle seat that does not lock.

Folding seats can fall forward and could cause serious injury to your child in a vehicle crash.



UNSAFE Vehicle Seat Belt Types

If you have any of these types of vehicle belt systems listed, **NEVER** use any of these to install your child restraint in the vehicle. These vehicle belt systems are ***UNSAFE*** to use to install your child restraint in the vehicle.

If available, **LATCH** can be used **IN PLACE OF** these vehicle belt types. Refer to your vehicle owner's manual for **LATCH** locations.

Motorized Shoulder Belt with Lap Belt

Motorized belts will not keep a child restraint in its seating position in a sudden stop or crash.



Lap or Shoulder Belt Mounted on Vehicle Door

These belts are mounted to a door and will not keep a child restraint in its seating position in a sudden stop or crash.

Non-Locking Lap Belts with Emergency Locking Retractor (ELR) The lap belt is always loose until it locks in a sudden stop or crash.



Lap/Shoulder Belts with 2 Retractors (including inflatable seat belts) Belts are attached to retractors at the ends of the lap and shoulder belt and attached to one latch plate.

SAFE Vehicle Seat Belt Types

If you have any of these types of vehicle belt systems listed, these are ***SAFE*** to use to install your child restraint in the vehicle. Review vehicle owner's manual for specific instructions on child restraint installation.

LATCH can be used **IN PLACE OF** these vehicle belt types. Refer to your vehicle owner's manual for LATCH locations.

✓ Lap Belt with Locking Latch Plate

The vehicle belt is tightened by pulling on the free end of the strap until the belt is tight.



✓ Lap Belt with Automatic Locking Retractor (ALR)

The automatic locking retractor does not allow the lap belt to get longer once it is buckled. The vehicle belt is tightened by feeding seat belt webbing into retractor.



✓ Lap/Shoulder Belt with Locking Latch Plate



The lap portion of this belt does not loosen once the belt is buckled.

The vehicle belt is tightened by pulling up hard on shoulder belt and feeding the webbing into the retractor.

✓ Lap/Shoulder Belt with Sliding Latch Plate



The latch plate slides freely along the lap/shoulder belt. Vehicle belts with sliding latch plates are typically locked at the retractor by pulling all of the webbing out slowly to switch the retractor.

Check vehicle owner's manual for specific instructions.

The vehicle belt is tightened after switching the retractor by pulling up hard on shoulder belt and feeding the webbing into the retractor.

8. Base Installation with LATCH

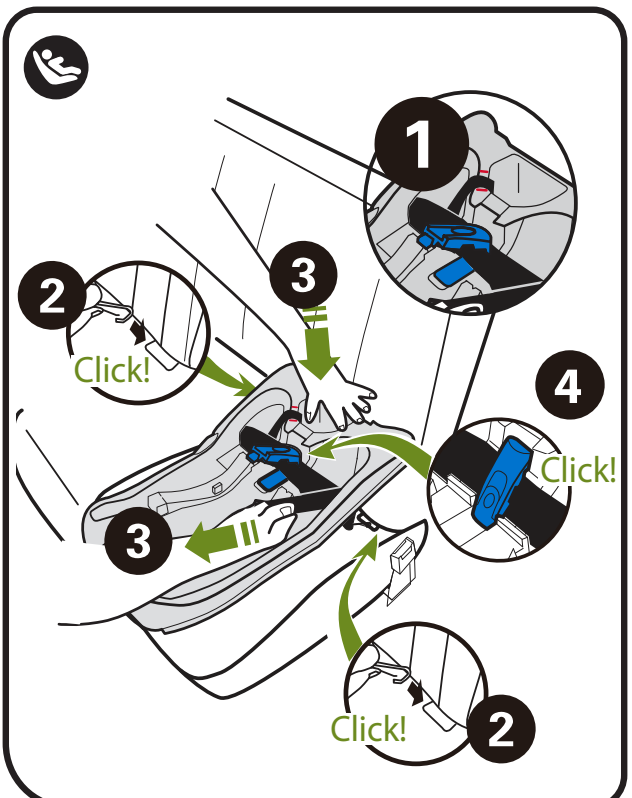

BEFORE installing base , make sure vehicle is on level ground. Place base on an approved LATCH vehicle seating location.



1. Remove LATCH strap from LATCH storage compartment and extend the strap to its longest length (see image 8, pg 27 for extending LATCH length). Lay the anchor strap between the 2 guide lines (shown in red). Route the LATCH belt through the belt path openings on both sides of base and under the belt lock-off. Make sure not to twist the belt and make sure it lies flat.

2. Clip the LATCH connectors onto the lower vehicle seat anchors on both sides of the base. CHECK to make sure they are attached by pulling on them.

3. Push down on the front of base and pull the strap to tighten base against the vehicle seat. CHECK to make sure base is secure by holding both sides of the base near the LATCH strap and moving it from side to side and front and back. The LATCH belt should not loosen and the base should not move easily. The base should not move more than 1 inch (2.5 cm) from side to side or front to back.

4. Close the lock-off over the LATCH belt until it clicks into place.

5 Attach the carrier into the base until you hear a click. Lift up on the handle of the carrier to make sure that it is securely attached in the base.

If the carrier does not latch securely into the base, CHECK to make sure green is visible on the indicators before installing the carrier onto the base. If green is NOT visible pull up on red release handle. ALWAYS lift up on the carrier to check that it is securely attached to base.

6 Check the level indicator to make sure it is level. If it is not level, remove LATCH connectors and adjust the foot on the base then re-install base. Check that the ball rests in the zone of your child's weight. Refer to pages 43-45 for Adjusting the Recline.







7 **To remove the seat from the base,** pull up the red release handle located on the base. Lift carrier away from the base.



8 **To remove LATCH,** open lock-off, push button on adjuster to loosen LATCH then unhook from the anchor point.

Repeat steps as shown on the other side of the base.

Store LATCH strap in the storage compartment.



Base Installation with Lap / Shoulder Belt

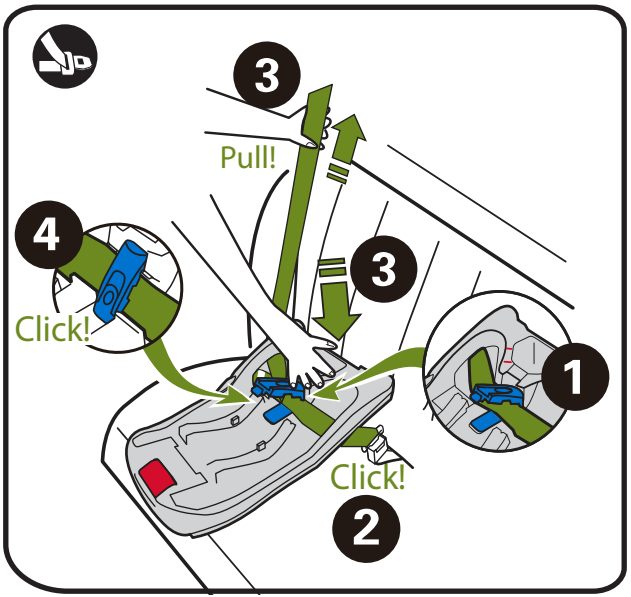

BEFORE installing base, make sure vehicle is on level ground. Place base on an approved vehicle seat location.



1. Route the lap/shoulder belt through the belt path openings on both sides of base and under the belt lock-off. Make sure not to twist the belts and make sure they lie flat.

2. Fasten the buckle until it clicks into place.

3. Push down on the foot end of base and pull the shoulder belt to tighten base against the vehicle seat.

4. Close the lock-off over the lap/shoulder belt until it clicks into place. CHECK to make sure base is secure by holding both sides of the base near the vehicle belt and moving it from side to side and front and back. The lap/shoulder belt should not loosen and the base should not move easily. The base should not move more than 1 inch (2.5 cm) from side to side or front to back.

5 Attach the carrier into the base until you hear a click. Lift up on the handle of the carrier to make sure that it is securely attached in the base.



If the carrier does not latch securely into the base, CHECK to make sure green is visible on the indicators before installing the carrier onto the base. If green is NOT visible pull up on red release handle. ALWAYS lift up on the carrier to check that it is securely attached to base.



6 Check the level indicator to make sure it is level. If it is not level, remove vehicle belt and adjust the foot on the base then re-install base. Check that the ball rests in the zone of your child's weight. Refer to pages 43-45 for Adjusting the Recline.



7 **To remove the seat from the base,** pull up the red release handle located on the base. Lift carrier away from the base.



8 **To remove child restraint from vehicle,** open lock-off and unbuckle the belt.

Base Installation with Lap Belt

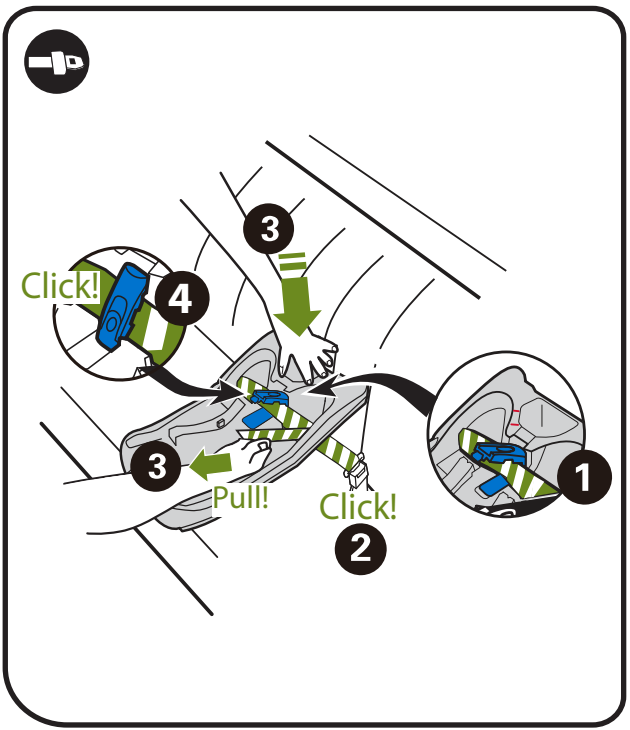

BEFORE installing base, make sure vehicle is on level ground. Place base on an approved vehicle seat location.



1. Route the lap belt through the belt path openings on both sides of base and under the belt lock-off. Make sure not to twist the belt and make sure it lies flat.

2. Fasten the buckle until it clicks into place.

3. Push down on the foot end of base and pull the free end of the lap belt to tighten base against the vehicle seat. CHECK to make sure base is secure by holding both sides of the base near the lap belt and moving it from side to side and front and back. The lap belt should not loosen and the base should not move easily. The base should not move more than 1 inch (2.5 cm) from side to side or front to back.

4. Close the lock off over the lap belt until it clicks into places.

5 Attach the carrier into the base until you hear a click. Lift up on the handle of the carrier to make sure that it is securely attached in the base.





If the carrier does not latch securely into the base, CHECK to make sure green is visible on the indicators before installing the carrier onto the base. If green is NOT visible pull up on red release handle. ALWAYS lift up on the carrier to check that it is securely attached to base.

6 Check the level indicator to make sure it is level. If it is not level, remove vehicle belt and adjust the foot on the base then re-install base. Check that the ball rests in the zone of your child's weight. Refer to pages 43-45 for Adjusting the Recline.



7 **To remove the seat from the base,** pull up the red release handle located on the base. Lift carrier away from the base.



8 **To remove child restraint from vehicle,** open lock-off and unbuckle the belt.

9. Child Restraint Installation WITHOUT the Base Using the Vehicle Belt

Lap Belt

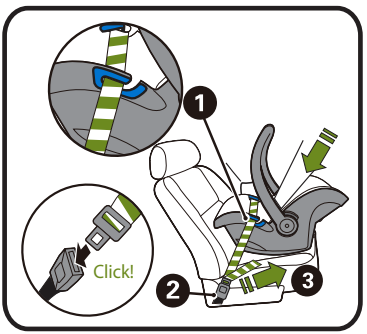

BEFORE installing carrier, make sure vehicle is on level ground. Place carrier on an approved vehicle seat location in a rear-facing position.



1. Route the lap belt through the lap belt guides on both sides of carrier. Make sure not to twist the belt and make sure it lies flat.

2. Fasten the buckle until it clicks into place.

3 Push down in center of carrier and pull the free end of the lap belt to tighten carrier against the vehicle seat. CHECK to make sure carrier is secure by holding both sides near the lap belt guides and moving it from side to side and front and back. The lap belt should not loosen and the carrier should not move easily. The carrier should not move more than 1 inch (2.5 cm) from side to side or front to back.

After installing carrier without base check the RED level line on the label beneath the handle to make sure that it is level with the ground.

If seat is still not level, refer to page 45, **when using the carrier with WITHOUT the base.**

Lap/Shoulder Belt

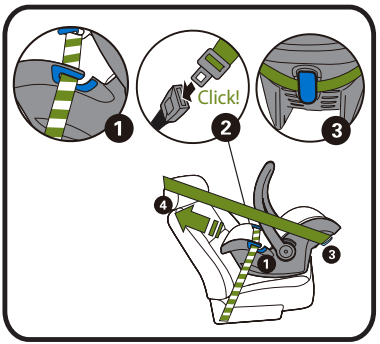

BEFORE installing carrier, make sure vehicle is on level ground. Place carrier on an approved vehicle seat location in a rear-facing position.



1. Route the lap portion of the lap/shoulder belt through the lap belt guides on both sides of carrier. Make sure not to twist the belt and make sure it lies flat.

2. Fasten the buckle to the vehicle until it clicks into place.

3 Route the shoulder portion of the belt around the rear of the seat and under the shoulder belt guide. If vehicle belt latch plate does not lock, then retractor must be switched. CHECK the vehicle owner's manual and page 23 to see how to lock your seat belt.

4 Pull on shoulder portion toward the retractor while pressing down on the center of the carrier to tighten carrier to vehicle seat.

CHECK to make sure carrier is secure by holding both sides near the lap belt guides and moving it from side to side and front and back. The lap belt should not loosen and the carrier should not move easily. The carrier should not move more than 1 inch (2.5 cm) from side to side or front to back.

After installing carrier without base check the RED level line on the label beneath the handle to make sure that it is level with the ground.

If seat is still not level, refer to page 45, **when using the carrier with WITHOUT the base.**

Lap/Shoulder Belt (Alternate Method)

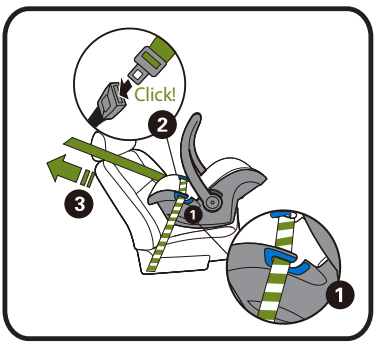

BEFORE installing carrier , make sure vehicle is on level ground. Place carrier on an approved vehicle seat location in a rear-facing position.



1. Route the lap portion of the lap/shoulder belt through the lap belt guides on both sides of carrier. Make sure not to twist the belt and make sure it lies flat. NEVER route the shoulder portion of the belt under the lap belt guides.
2. Fasten the buckle to the vehicle until it clicks into place.

3 Pull on shoulder portion of vehicle belt while pushing down in the center of the seat to tighten carrier to vehicle seat. If vehicle belt latch plate does not lock, then retractor must be switched. CHECK the vehicle owner's manual and page 23 to see how to lock your seat belt.

CHECK to make sure carrier is secure by holding both sides near the lap belt guides and moving it from side to side and front and back. The lap belt should not loosen and the carrier should not move easily. The carrier should not move more than 1 inch (2.5 cm) from side to side or front to back.

After installing carrier without base check the RED level line on the label beneath the handle to make sure that it is level with the ground.

If seat is still not level, refer to page 45, **when using the carrier with WITHOUT the base.**

10. Checking the Recline

⚠WARNING

Improper recline of your child restraint or base could cause serious injury or death.

If the child restraint is too upright, an infant's head could drop forward and cause suffocation or breathing problems.

If the child restraint is too reclined, a sudden stop or vehicle crash could cause injury to a child's neck or shoulders.

When using the child restraint WITHOUT base :

1) Make sure vehicle is on level ground.

2) Check the RED level line on the label beneath the handle to make sure that it is level with the ground.

3) If it it not level, see page 45 on how to adjust carrier with rolled towel.

When using the child restraint and the base together:

1) Make sure vehicle is on level ground.

2) Only use the level indicator on the base to make sure the seat and base are level.



3) Recline base until ball rests in the zone of your child's weight.



If seat is still not level, refer to page 44-45 to Adjusting the Recline.

11. Adjusting the Recline

The base has 2 recline adjustment positions for the foot.

To raise the foot, pull the foot out from the bottom of the base then push it up until it snaps into place.

To lower the foot, pull foot down, rotate under seat until it snaps into the bottom of the base.

When using the carrier with the base, if the foot is in the raised position and the ball still falls in the red zone you may need to place a tightly rolled towel under the foot end of the base in order to get the seat to become level.



NEVER place a rolled towel under the child's head end of the base. If towel is used , it must only be used in position shown.



When using the carrier with WITHOUT the base, ALWAYS CHECK the red level line on the carrier each and every time you use your child restraint to make sure it is level with the ground. If it is not place a tightly rolled towel under the foot end of the carrier as shown to level it.



NEVER place a rolled towel under the child's head end of the carrier. If towel is used, it must only be used in position shown.

12. Placing Your Child in the Carrier

⚠WARNING

Improper placement of the harness straps and buckle strap increases the risk of serious injury or death in a sudden stop or vehicle crash.

Depending on whether you have a smaller or larger size child, you will need to adjust harness strap positions, buckle strap and waist strap locations. Please review the following sections on pages 46-55 before changing any strap positions.

1 Rotate handle out of the way and place child in carrier. Place your child in the carrier with their bottom pushed back and their back flat against the seat. You will need to check the proper placement for the harness strap position. The harness strap position should be at or below the child's shoulders.

If you need to change the harness strap position, remove child from child restraint and follow these steps to change the harness strap position:

2 From the front of seat, you will need to loosen the harness straps to be able to remove the harness from the splitter plate. Push the harness adjuster button and pull the harness straps toward you.



3 Turn the seat over and remove the harness straps from the splitter plate as shown.



4 Turn the seat back over to the front side and pull the straps out of the slots and re-insert them into the slots that are at or below your child's shoulders.

Make sure you place them through the same set of slots in the seat pad and the seat shell.

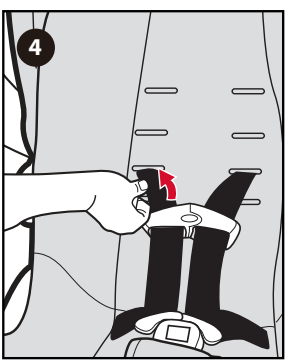

5 Attach harness straps to the splitter plate depending on the size of your child, see page 48.

For Larger Babies:
Thread harness straps through either slots 3 or 4 depending on the size of your child and attach loops (**B**) to splitter plate.



For Smaller Babies:
Thread harness straps through either slots 1 or 2 depending on the size of your child and attach loops (**A**) to splitter plate.
Refer to page 51, Step 7 to fasten extra length of loops to the harness.



MAKE SURE that the harness straps and harness adjustment strap are routed under the metal rods as shown.
CHECK STEP: Make sure harness straps are not twisted and double check that they are completely on the splitter plate.



Changing the Buckle Strap Position

Turn the child restraint over and push the tab out of the way while pushing on the metal to unlock it from the carrier.



Push the metal retainer through the slot and pull buckle strap out of the front of the seat.

Depending on the size of your child you will need to use the slot closet to your child:
For Larger Babies: Use front slot.
For Smaller Babies: Use rear slot.



Push metal retainer through the slot that fits closest to your child.
Pull up on the buckle strap from the front of the seat to get the metal retainer to snap into place under the tab.
CHECK to make sure the metal retainer is fully snapped into place and underneath tab and red button on buckle is pointing away from seat.



Changing the Waist Strap Position

For Smaller Babies:

In order to change waist strap position, you will need to remove the harness, the seat pad, the chest clip and the buckle tongues.

1) Insert the harness straps up through the bottom side of the shell through the inner waist slots with the folded portion of the strap facing in seating area as shown. MAKE SURE harness straps are not twisted.

2) Lay pad on seat and pull straps up through the inner seat pad waist strap slits as shown.

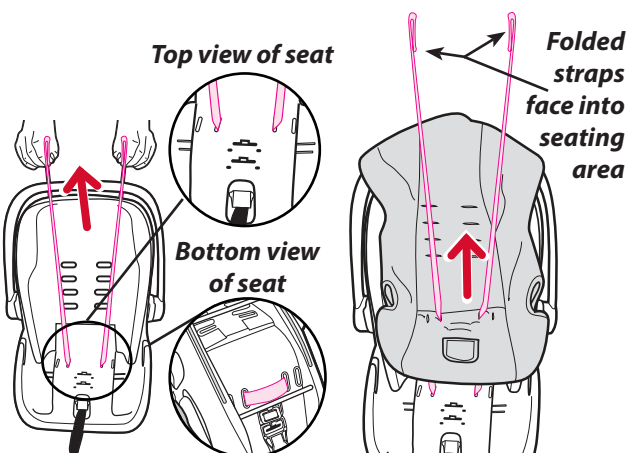

3) Re-attach the buckle tongues then the chest clip as shown.



4) Re-insert the harness straps through the same set of slots in seat pad and shell of the seat that are appropriate for the size of your child.

5) Turn the seat over and pull harness straps through the back of the shell.



6) Re-assemble straps onto the splitter plate onto loops (A) as shown on page 48 and below.

7) Fasten the bottom set of loops onto the hook and loop patches on the harness as shown.





Changing the Waist Strap Position

For Larger Babies:
In order to change waist strap position, you will need to remove the harness, the seat pad, the chest clip and the buckle tongues.

1) Insert the harness straps into the inner slots from the top side of the shell then pull them back up through the outer slots with the folded portion of the strap facing in. MAKE SURE harness straps are not twisted.

2) Pull straps up through the outer seat pad waist strap slits as shown.

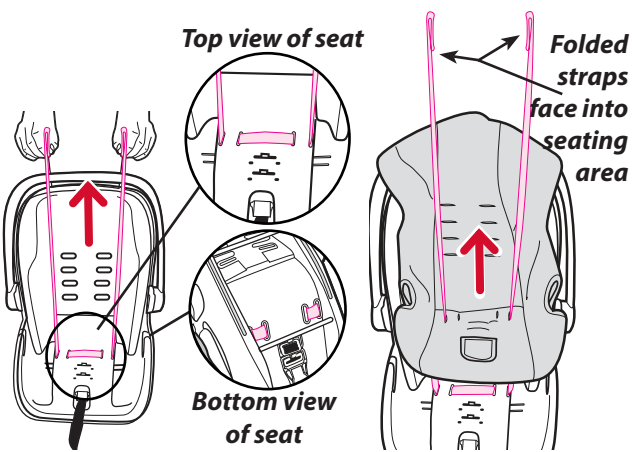

3) Re-attach the buckle tongues then the chest clip as shown.



4) Re-insert the harness straps through the same set of slots in seat pad and shell of the seat that are appropriate for the size of your child.



5) Turn the seat over and pull harness straps through the back of the shell.

6) Re-assemble straps onto the splitter plate onto loops (B) as shown and shown and on page 48.



Using the Body Support

⚠WARNING

To prevent ejection or serious injury, only use the body support when the harness is used in the bottom 2 sets of harness slots.

If there is a gap between the buckle strap and the child, place a tightly rolled washcloth around the buckle strap.

Using the Preemie Insert

⚠WARNING

To prevent ejection or serious injury:

• For low birth-weight infant, you must always use the preemie insert in the body support.

The preemie insert must be used for infants who weigh less than 6 lbs (2.7 kg).

• To prevent suffocation, always place preemie insert into the pocket located on the back of the body support exactly as shown.

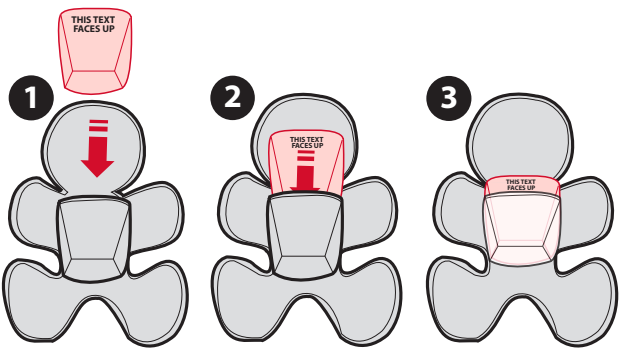

The preemie insert is designed to only be inserted into pocket one way. The words " THIS TEXT MUST FACE UP" on the label must be visible when inserting it into the pocket.

13. Securing your Child in the Restraint

⚠WARNING

Improper placement of the harness straps and buckle strap increases the risk of serious injury or death in a sudden stop or vehicle crash.

Rotate handle out of the way. Push the harness adjuster button then pull the harness straps toward you.



Open the chest clip by pressing the button in the center as shown.



Separate the two pieces as shown and move the straps out of the way.



Place your child in the carrier with their bottom pushed back and their back flat against the seat. Place the harness straps around your child.
CHECK to make sure harness is at or below the childs' shoulders.

Insert the buckle tongues into the buckle as shown. MAKE sure you hear them click into place.
DO NOT use child restraint if buckle tongues DO NOT click into the buckle. Try cleaning the buckle. If this does not remedy the problem, please call Customer Service before using the child restraint.



Fasten chest clip together and center on child's chest level with their armpit.



Slowly pull harness adjuster strap to make the shoulder straps snug around the child's shoulders. BE CAREFUL not to allow the chest clip to slide up into their neck when tightening.



CHECK STEP:
MAKE SURE the straps are flat, not twisted and snug. If you can pinch a fold in the strap it is not snug.

A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

14. LATCH Storage

Fold LATCH Belt up as shown and place inside the storage compartment.



15. Instruction Manual Storage

There is a small tag on the seat pad indicating the location for the instruction manual storage.

Fold manual in half and store under the seat pad in the groove in the seat as shown.



16. Care and Maintenance

Cleaning the Seat Pad:
Refer to the care tag on your seat pad for washing instructions. NEVER use carrier without the seat pad attached.

Cleaning the Harness and Shell:
Sponge clean using warm water and mild soap. Do not use any other cleaning agents or bleach.

Harness Straps:
Wipe clean with damp cloth. DO NOT SOAK straps in water as this may weaken them.

Cleaning the Buckle:
Food, drink or other debris may collect inside the harness buckle which can affect proper function.

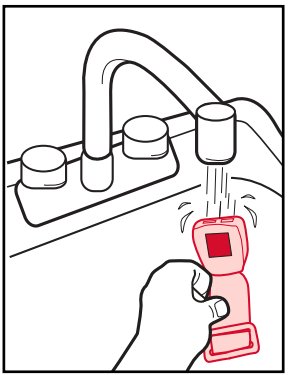

Wash in warm water until clean. When inserting the buckle tongues, be sure you can hear an audible click to make sure the buckle is working properly.

Do not use detergents or lubricants.

17. Warranty Information and Replacement Parts

For information about warranty and replacement parts, please contact:

Aria Child Inc.

530 Harrison Ave Boston, MA 02118
or call 1-888-569-7288

or visit www.urbinibaby.com